(19) World Intellectual Property Organization

International Bureau



(43) International Publication Date 14 April 2005 (14.04.2005)

PCT

(10) International Publication Number WO 2005/034443 A1

(51) International Patent Classification⁷:

H04L 12/56

(21) International Application Number:

PCT/GB2004/004179

(22) International Filing Date: 1 October 2004 (01.10.2004)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

0323244.4


3 October 2003 (03.10.2003) GB

- (71) Applicant (for all designated States except US): FUJITSU LIMITED [JP/JP]; 1-1, Kamikodanaka 4-chome, Nakahara-ku, Kawasaki-shi, Kanagawa 211-8588 (JP).
- (72) Inventor; and
- ABEDI, Saied (75) Inventor/Applicant (for US only): [IR/GB]; 9 The Pinnacle, Kings Road, Reading, Berkshire RG1 4LS (GB).

- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

with international search report

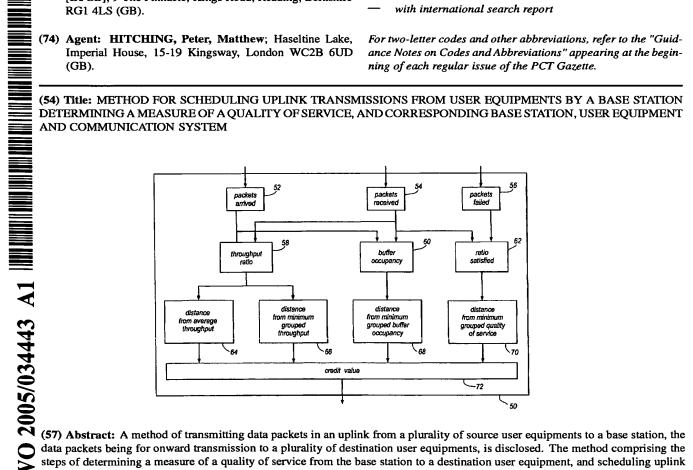

data packets being for onward transmission to a plurality of destination user equipments, is disclosed. The method comprising the steps of determining a measure of a quality of service from the base station to a destination user equipment, and scheduling uplink transmissions from the source user equipments to the base station in dependence on the measure of a quality of service.

